

VB 750 DK_{STAGE 5}



Drive*

Engine	381 PS (280 kW) CAT C9.3 Stage 5
max. torque	240.000 Nm
Engine speed in rpm	2.200
Fuel capacity in liter (l)	470

Discharge belt*

discharge height in mm	4.600 bei 33°
belt width in mm	1.400

shafts*

working length in mm	1.497
total length in mm	1.874
shaft diameter in mm	650
Rotation of shafts in min-1	8 - 38
wear plates	installed on both sides

Hopper*

Hopper volume in m³	7
Main & tilting hopper	Tilting hopper with surface for long materials


Dimensions & Weight*

working dimension LxBxH	11,9 x 2,5 x 5,6
transport dimension LxBxH	8,0 x 2,5 x 2,9
weight in tons (t)	21 + 2 (magnet)


Speial Features

- "Easy to use" control (mobile SPS)

WORKING POSITION

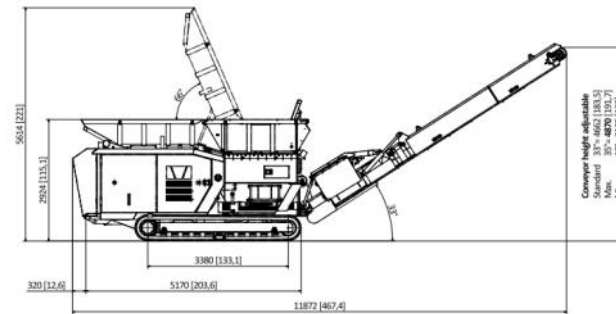

TRANSPORT POSITION

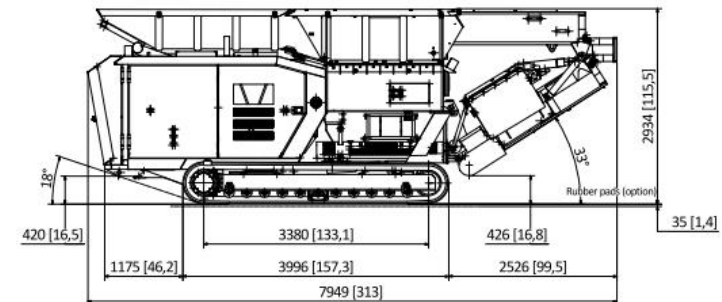

* approx. values, depending on configuration, without engagement