


VB 850 DK STAGE 5




Drive*	
Engine	520 PS (383 kW) Cummins X 12
max. torque	320.000 Nm
Engine speed in rpm	1.900
Fuel capacity in liter (l)	680
Discharge belt*	
discharge height in mm	4.800 bei 33°
belt width in mm	1.400
shafts*	
working length in mm	1.770
total length in mm	2.348
shaft diameter in mm	850
Rotation of shafts in min-1	7 - 24
wear plates	installed on both sides
Hopper*	
Hopper volume in m³	8
Main & tilting hopper	Tilting hopper with surface for long materials
Dimensions & Weight*	
working dimension LxBxH	12,8 x 2,6 x 6,0
transport dimension LxBxH	8,6 x 2,6 x 3,2
weight in tons (t)	35 + 3 (magnet)
Speial Features	
• "Easy to use" control (mobile SPS)	

WORKING POSITION

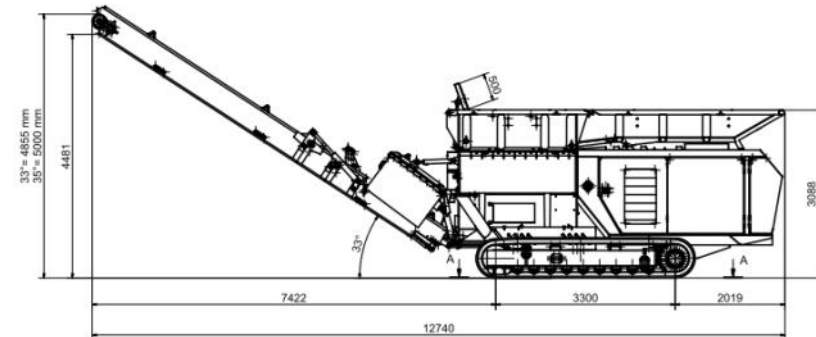

TRANSPORT POSITION

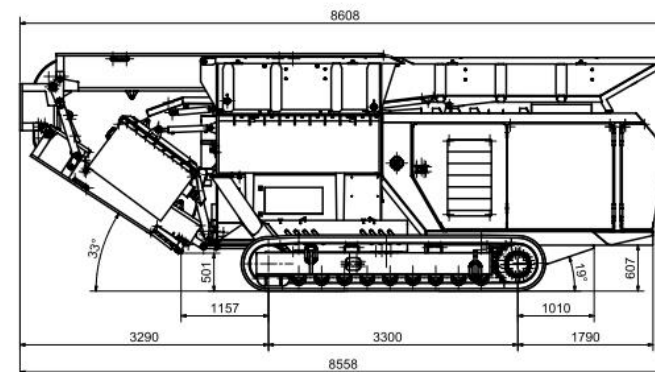

* approx. values, depending on configuration, without engagement

last updated May 2021