

VB 950 DK STAGE 5



Drive*

Engine	770 PS (563 kW) CAT C18 - stage V with exhaust system
max. torque	480.000 Nm
Engine speed in rpm	1.900
Fuel capacity in liter (l)	950

Discharge belt*

discharge height in mm	5.281 bei 33°
belt width in mm	1.400

shafts*

working length in mm	2.370
total length in mm	2.948
shaft diameter in mm	870
Rotation of shafts in min-1	9 - 33
wear plates	installed on both sides
bearing plates	with integrated lashing point for shaft change

Hopper*

Hopper volume in m³	11
Main & tilting hopper	Tilting hopper with surface for long materials


Dimensions & Weight*

working dimension LxBxH	15,5 x 3,0 x 5,3
transport dimension LxBxH	11,4 x 3,0 x 5,3
weight in tons (t)	44 + 3 (magnet)


Speial Features

- "Easy to use" control (mobile SPS)
- Magnet holder parallel to discharge belt
- Integrated warning lights for fault and diesel reserve positioned on both sides
- Reduction of side cooler, therefore increased noise reduction

WORKING POSITION

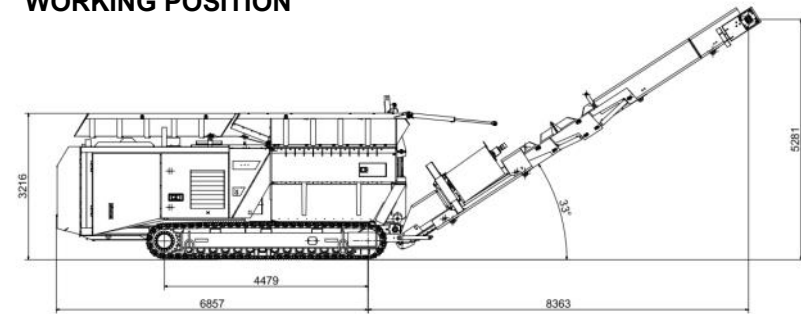

TRANSPORT POSITION

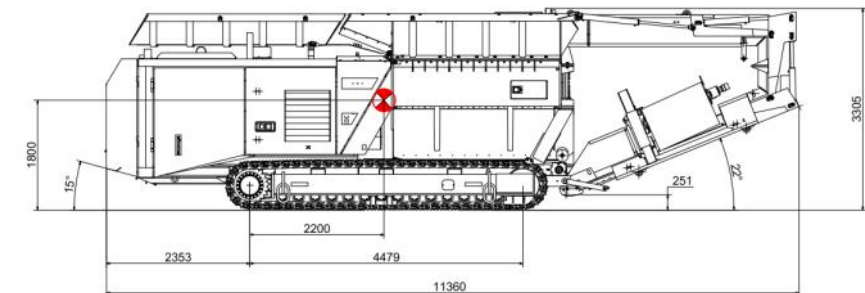

* approx. values, depending on configuration, without engagement